




FANIMATION
studio collection

AIREFLEX™

LP7675LBN

(Lowes Item #2599793)

52" Ceiling Fan

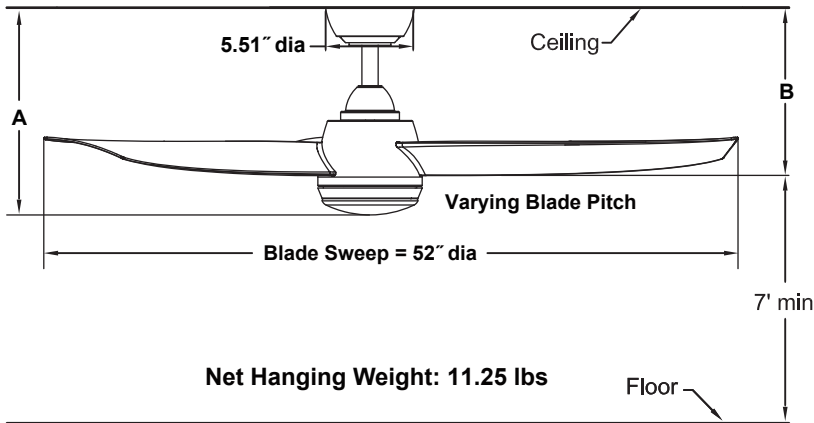

	A	B
Fan w/4.5" downrod	13.28"	10.53"
Fan w/12" downrod	20.78"	18.03"
Fan w/18" downrod	26.78"	24.03"
Fan w/24" downrod	32.78"	30.03"
Fan w/36" downrod	44.78"	42.03"
Fan w/48" downrod	56.78"	54.03"
Fan w/60" downrod	68.78"	66.03"
Fan w/72" downrod	80.78"	78.03"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

100 x 30 DC motor is designed for optimal performance with this fan. Fan is Energy Star Rated.

BLADES:

A set of three 24" composite blades is included.

CONTROL OPTIONS:

TR305S hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Optional TW306 wall control is available — sold separately. Instructions is provided with each control.

LIGHTING OPTIONS:

One 18-watt CCT LED (Warm/Natural/Cool) included.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 4.5" long downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a standard 18" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations. This fan is for rooms up to 400 sq ft.

Available Finishes

LBN

Brushed Nickel with Gray Blade and Opal Frosted Glass

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 th)	161	5910	268	0.35	22
Med (9 th)	100	3513	620	0.10	6
Low (1 th)	29	809	415	0.05	2

Energy Guide FTC

Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
15	4500	4	296

Lighting Information (120V)

Light Bulb	Lumens Amount	Delivered Lumens	Color Temp	CRI	Shade/Glass type
18W CCT LED	1600	796/861/848	Warm/Natural/Cool	90%	Opal Frosted