


COVERT™

LP8359LAZ

(Lowes Item #588962)

64" Ceiling Fan

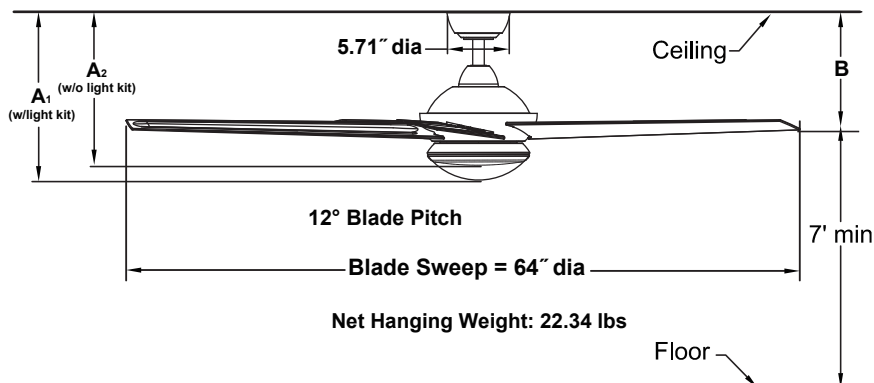

	A1	A2	B
Fan w/4.5" downrod	14.86"	13.51"	11.14"
Fan w/12" downrod	22.36"	21.01"	18.64"
Fan w/18" downrod	28.36"	27.01"	24.64"
Fan w/24" downrod	34.36"	33.01"	30.64"
Fan w/36" downrod	46.36"	45.01"	42.64"
Fan w/48" downrod	58.36"	57.01"	54.64"
Fan w/60" downrod	70.36"	69.01"	66.64"
Fan w/72" downrod	82.36"	81.01"	78.64"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

158 x 22 DC sensorless motor is designed for optimal performance with this fan. Fan is Energy Star Rated.

BLADES:

A set of five 29" composite blades is included.

CONTROL OPTIONS:

TR305S hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Optional TW306 wall control is available — sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

One 18-watt CCT LED (Warm/Natural/Cool) included.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 4.5" long downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a standard 18" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well — sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations. This fan is for room over 400 sq ft.

Available Finishes

LAZ

Aged Bronze with Dark Walnut Blade and Opal Frosted Glass / Steel Cap

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 th)	141	6909	262	0.41	26
Med (9 th)	89	4217	568	0.12	7
Low (1 th)	29	1412	689	0.04	2

Energy Guide FTC

Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
17	4982	5	297

Lighting Information (120V)

Light Bulb	Lumens Amount	Delivered Lumens	Color Temp	CRI	Shade/Glass type
18W CCT LED	1600	564/599/580	Warm/Natural/Cool	90%	Opal Frosted