




KINDRED™

LP8543LGR
(Lowes Item #2599788)
60" Ceiling Fan

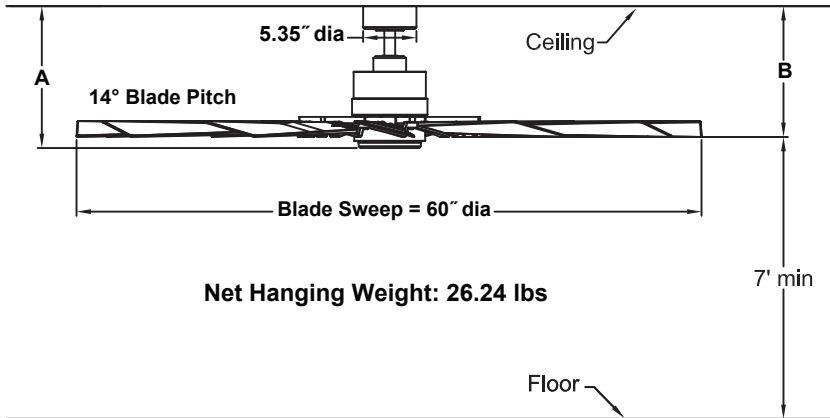

	A	B
Fan w/4.5" downrod	13.65"	12.84"
Fan w/12" downrod	21.15"	20.34"
Fan w/18" downrod	27.15"	26.34"
Fan w/24" downrod	33.15"	32.34"
Fan w/36" downrod	45.15"	44.34"
Fan w/48" downrod	57.15"	56.34"
Fan w/60" downrod	69.15"	68.34"
Fan w/72" downrod	81.15"	80.34"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

DC-165NL sensorless DC motor is designed for optimal performance with this fan. Fan is Energy Star Rated.

BLADES:

A set of twelve 22" composite blades is included.

CONTROL OPTIONS:

TR305S hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Optional TW306 wall control is available — sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

One 18-watt CCT LED (Warm/Natural/Cool) included.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 4.5" long downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a standard 12" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well — sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations. This fan is for room over 400 sq ft.

Available Finishes

LGR

Matte Greige with Weathered Wood Blade and Opal Frosted Glass

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 th)	127	6162	203	0.40	30
Med (9 th)	81	4009	477	0.13	8
Low (1 th)	29	1233	576	0.04	2

Energy Guide FTC

Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
20	3861	6	197

Lighting Information (120V)

Light Bulb	Lumens Amount	Delivered Lumens	Color Temp	CRI	Shade/Glass type
18W CCT LED	1600	558/594/588	Warm/Natural/Cool	90%	Opal Frosted