


**TWOFOLD™**

**LP8551LBL**

(Lowes Item #2599770)

**60" Ceiling Fan**

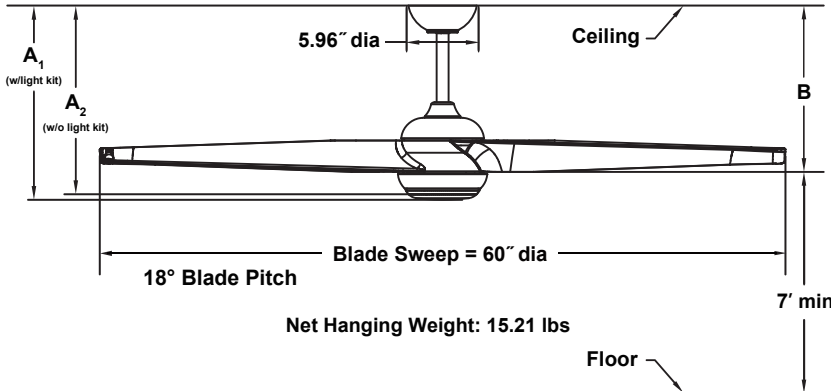

	A <sub>1</sub>	A <sub>2</sub>	B
Fan w/8" downrod	16.92"	16.49"	14.48"
Fan w/12" downrod	20.92"	20.49"	18.48"
Fan w/18" downrod	26.92"	26.49"	24.48"
Fan w/24" downrod	32.92"	32.49"	30.48"
Fan w/36" downrod	44.92"	44.49"	42.48"
Fan w/48" downrod	56.92"	56.49"	54.48"
Fan w/60" downrod	68.92"	68.49"	66.48"
Fan w/72" downrod	80.92"	80.49"	78.48"

#### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

#### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

#### MOTOR SPECS:

DC153-10NS sensorless DC motor is designed for optimal performance with this fan. Fan is Energy Star Rated.

#### BLADE SET:

A set of two 30" composite blades is included.

#### CONTROL OPTIONS:

TR305S hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Optional TW306 wall control is available — sold separately. Instructions are provided with each control.

#### LIGHTING OPTIONS:

One 18-watt CCT LED (Warm/Natural/Cool) included.

#### DOWNROD OPTIONS:

Fan comes with a 1" dia. x 8" long downrod (DRT1-8). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a standard 18" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well — sold separately. Call technical support for more information.

#### LOCATION USE:

Fan is rated for dry and damp locations. This fan is for room over 400 sq ft.

#### Available Finishes

LBL	Black with Black Blade and Opal Frosted Glass / Steel Cap
-----	---

#### Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 <sup>th</sup> )	131	5326	164	0.43	33
Med (9 <sup>th</sup> )	83	3300	430	0.13	8
Low (1 <sup>th</sup> )	30	1136	516	0.04	2

#### Energy Guide FTC

Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
21	4223	6	203

#### Lighting Information (120V)

Light Bulb	Lumens Amount	Delivered Lumens	Color Temp	CRI	Shade/Glass type
18W CCT LED	1600	558/597/584	Warm/Natural/Cool	90%	Opal Frosted