
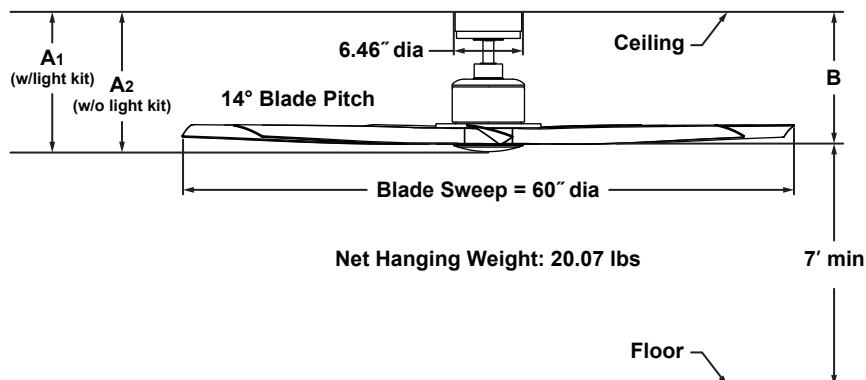


LENZI™

FPD7060** 60" Ceiling Fan

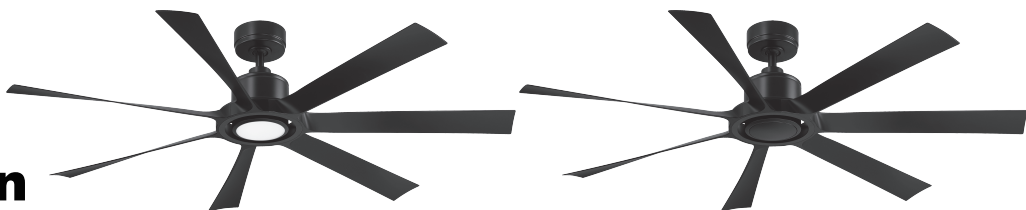

	A1	A2	B
Fan w/4.5" downrod	13.40"	13.40"	12.78"
Fan w/12" downrod	20.90"	20.90"	20.28"
Fan w/18" downrod	26.90"	26.90"	26.28"
Fan w/24" downrod	32.90"	32.90"	32.28"
Fan w/36" downrod	44.90"	44.90"	44.28"
Fan w/48" downrod	56.90"	56.90"	56.28"
Fan w/60" downrod	68.90"	68.90"	68.28"
Fan w/72" downrod	80.90"	80.90"	80.28"

INSTALLATION REQUIREMENTS:


Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

DC135 sensorless DC motor is designed for optimal performance with this fan.



**featuring KwikWire
easy connection**

BLADE SET:

A set of seven 26" composite blades is included.

CONTROL OPTIONS:

A WiFi receiver and TR360 hand-held remote control are included. Push button remote control with 6 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Visit the Apple APP Store or Google Play Store to download the free fanSync WiFi APP and create your Fanimation fanSync account. Optional TW406 wall control is available — sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

One 24-watt CCT LED (Warm/Soft/Bright/Cool/Daylight) included.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 4.5" long downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a standard 24" downrod or longer downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well — sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations. This fan is for room over 400 sq ft.

Available Finishes

BL	Black with Black Blades and Opal Frosted Glass / Steel Cap
BLBN	Black and Brushed Nickel with Black Blades and Opal Frosted Glass / Steel Cap
MW	Matte White with Matte White Blades and Opal Frosted Glass / Steel Cap
MWBS	Matte White and Brushed Satin Brass with Matte White Blades and Opal Frosted Glass / Steel Cap

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (6 th)	116	7909	245	0.47	32
Med (4 th)	90	5978	396	0.23	15
Low (1 th)	50	3306	782	0.08	4

Energy Guide FTC

Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
22	5751	6	257

Fan Velocity (FPM)

High Speed Velocity	Average Velocity
565	403

Lighting Information (120V)

Light Bulb	Lumens Amount	Delivered Lumens	Color Temp	CRI	Shade/Glass type
24W CCT LED	2000	791/798/834/850/842	Warm/Soft/Bright/Cool/Daylight	90%	Opal Frosted