


LK4520** Down Light Kit Installation Instructions

READ AND SAVE THESE INSTRUCTIONS

Weight: 7.5 lbs (3.4 kgs)

NOTE: This LK Accessory is to be used for the Involution™ Ceiling Fan only.

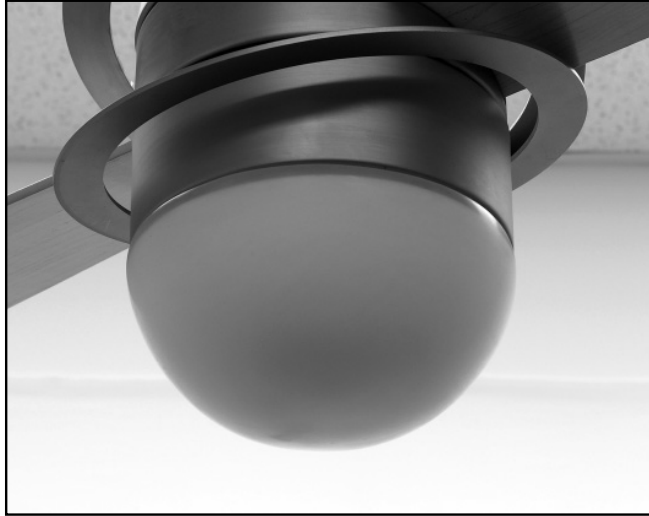

CAUTION

Turning off wall switch is not sufficient. To reduce the risk of fire and electrical shock, be sure electricity is turned off at the main fuse box to the fan before installing the accessory.

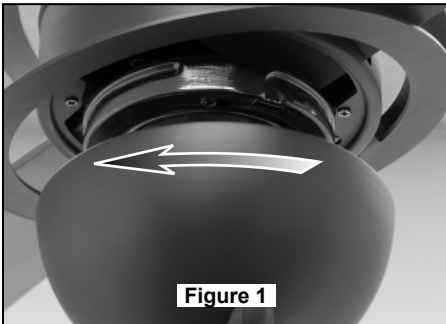


Fig-1. Remove Lower Cover Assembly by twisting in a counter-clockwise direction.

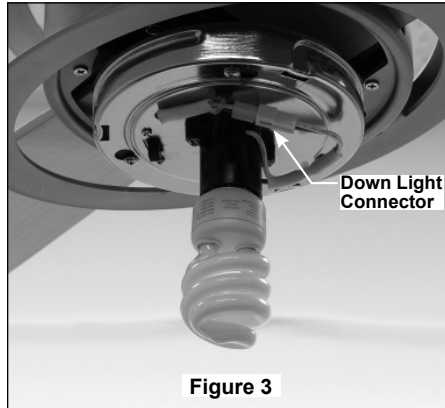


Figure 3

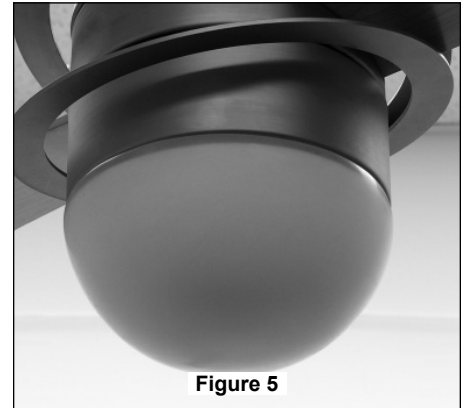


Figure 5

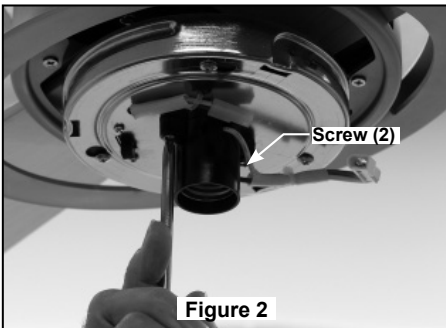


Fig-2. Install Down Light Socket Assembly with two screws provided.

Fig-3. Securely attach the two-pin Down Light connector to wiring harness socket on the Switch Cup Assembly and the 13 watt CFL bulb provided.

Fig-5. Restore electrical power.



Figure 4

Fig-4. Assemble the Down Light Housing/ Glass Assembly by twisting in the clockwise direction. Don't over-tighten.

LK4520** Down Light Kit Service Parts



Parts List - LK4520**

Item #	Description	Qty.	Part #
1	Socket Assembly	1	AP452010
2	Pan Head Screws	2	-
3	13 watt CFL Bulb	1	-
4	Down Light Assembly	1	AP452008**

Before discarding packaging materials, be certain all parts have been removed

How To Order Parts

When ordering repair parts, always give the following information:

- Part Number
- Part Description
- Fan Model Number

Contact your retail store for repair parts.

