




BP225OB1 Series Ceiling Fans

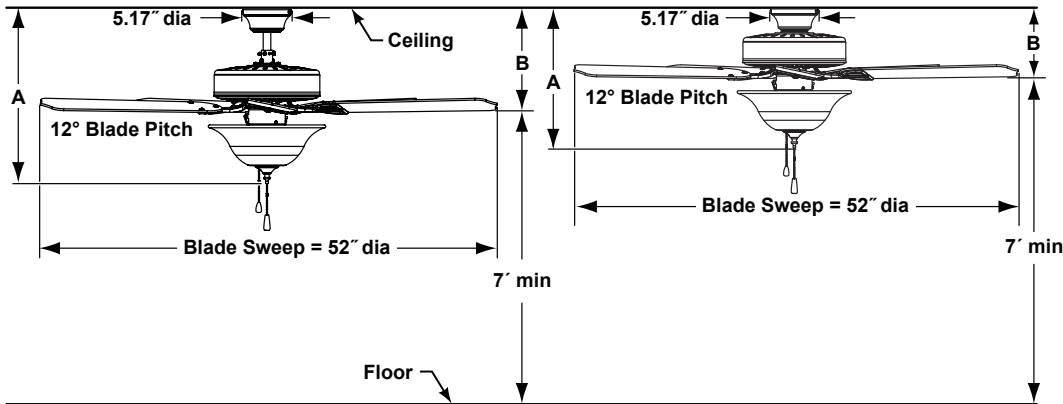

Net Hanging Weight: 18.5 lbs

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 15 AC motor is designed for optimal performance with this fan.

BLADES:

A set of five 21" traditional wood blades is included.

CONTROL OPTIONS:

Optional CW1SW, CW2, CWRL4 and CW60WH wall controls available—sold separately. Optional BTCR9, C4, CRL4WH and CRL8TS remote controls with receiver unit and BTR9 receiver unit are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

A 3-bulb (60 watt max incandescent candelabra bulbs - included) downlight fixture with 1 bowl glass shades is included with this fan assembly. Maximum downlight wattage not to exceed 180 watts.

DOWNROD OPTIONS:

Dual mount for flush mount application or 1" dia x 4.5" long downrod. Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for slope an angles up to 42°. Optional close-to-ceiling kit is available as well-sold separately. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Call technical support for more information.

LOCATION USE:

Fans are rated for dry locations only.

	A	B
Fan In Close to Ceiling Configuration	15.48"	7.74"
	A	B
Fan w/4.5" downrod	19.30"	11.10"
Fan w/12" downrod	26.80"	18.60"
Fan w/18" downrod	32.80"	24.60"
Fan w/24" downrod	38.80"	30.60"
Fan w/36" downrod	50.80"	42.60"
Fan w/48" downrod	62.80"	54.60"
Fan w/60" downrod	74.80"	66.60"
Fan w/72" downrod	86.80"	78.60"

Available Finishes	
Fan Assembly / Glass	Blades - Traditional
OB – Oil-rubbed bronze / Frosted White	Cherry / walnut reversible

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	188	5897	92	0.53	64
Med	124	3701	126	0.37	29
Low	65	1744	171	0.21	10

Energy Guide FTC (Hugger)			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
30	2682	8	90

Energy Guide FTC (Standard)			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
30	2901	8	97

Light Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
incandescent Candelabra	60	3	1680	2700	99%