
## **HUBBARDTON FORGE® SERIES**



# HF6050\*\* Standard Fan

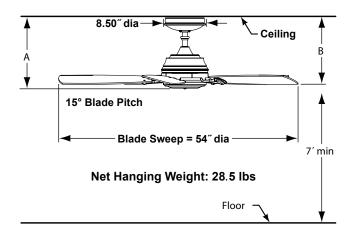

	Α	В
Fan w/6" downrod	14.59"	13.68″
Fan w/12" downrod	20.59"	19.68″
Fan w/18" downrod	26.59"	25.68"
Fan w/24" downrod	32.59"	31.68″
Fan w/36" downrod	44.59"	43.68"
Fan w/48" downrod	56.59"	55.68"
Fan w/60" downrod	68.59"	67.68"
Fan w/72" downrod	80.59"	79.68″

Available Finishes			
Model	Fan Finish	Blade Finish	
HF6050BZ	Bronze	Coffee	
HF6050DS	Dark Smoke	Slate	
HF6050MH	Mahogany	Coffee	

Airflow / Energy Efficiency Info (120V)

CFM / Watts

109

136

Amps

0.61

0.39

0.26

Watts

72

32

15

**CFM** 

5784

3470

2052

# **INSTALLA TION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

#### **ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

#### MOTOR SPECS:

188 x 25 motor is designed for optimal performance with this fan.

#### **BLADES:**

A set of five wood blades is included.

### CONTROL OPTIONS:

TR20WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels, reverse and off button. Optional CWRL4 wall control, CRL4WH and CRL8TS hand-held remote control are available—sold separately. Instructions are provided with each control.

#### **DOWNROD OPTIONS:**

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

#### **LOCATION USE:**

Fan is dry location rated only. Damp location rated when used with optional all-weather composite blade set (BPW21CF).



Fan Speed

High

Med

Low

Max RPM

163

102

64

